



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04B 7/005</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/07600</b> <b>(43) International Publication Date:</b> 27 February 1997 (27.02.97)
<b>(21) International Application Number:</b> PCT/FI96/00444 <b>(22) International Filing Date:</b> 16 August 1996 (16.08.96) <b>(30) Priority Data:</b> 953902 18 August 1995 (18.08.95) FI <b>(71) Applicant (for all designated States except US):</b> NOKIA MOBILE PHONES LTD. [FI/FI]; Nakolankatu 8, FIN-24100 Salo (FI). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> SAARIO, Eija [FI/FI]; Kloorantie 1 A 1, FIN-00200 Helsinki (FI). <b>(74) Agent:</b> TEKNOPOLIS KOLSTER OY; c/o Oy Kolster AB, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> A METHOD FOR ADJUSTING TRANSMIT POWER DURING CALL SET-UP, AND A CELLULAR RADIO SYSTEM <b>(57) Abstract</b> <p>The invention relates to a cellular radio system and a method for adjusting transmit power during call set-up in a cellular radio system comprising in each cell at least one base station (100) and a group of subscriber equipments (108-112) communicating with one or several base stations. In the method, the signal-to-noise ratio between a subscriber equipment and a base station is estimated before an actual connection is set up. In order that the new connection would not interfere with the existing connections, in the method according to the invention a value with which the desired signal-to-noise ratio is obtained is calculated for the transmit power of the transmitter (100, 108-112). A certain initial value is calculated for the transmit power by means of the power-control parameters of the system and a given time constant, and the transmission is started with the calculated initial value, and the transmit power is increased from the initial power to said value during the given time constant.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

A method for adjusting transmit power during call set-up, and a cellular radio system

#### Field of the invention

5           The present invention relates to a method for adjusting transmit power during call set-up in a cellular radio system comprising in each cell at least one base station and a group of subscriber equipments communicating with one or several base stations, and in  
10       which method the signal-to-noise ratio between a subscriber equipment and a base station is estimated before an actual connection is set up.

#### Background of the invention

15       The present invention is applicable for use in all cellular radio systems and in so-called WLL (Wireless Local Loop) systems that are interference-limited, and especially in a radio system utilizing code division multiple access. Code division multiple access (CDMA) is a multiple access method, which is  
20       based on the spread spectrum technique and which has been applied recently in cellular radio systems, in addition to the prior FDMA and TDMA methods. CDMA has several advantages over the prior methods, for example spectral efficiency and the simplicity of frequency  
25       planning.

          In the CDMA method, the narrow-band data signal of the user is multiplied to a relatively wide band by a spreading code having a considerably broader band than the data signal. In known test systems,  
30       bandwidths such as 1.25 MHz, 10 MHz and 25 MHz have been used. In connection with multiplying, the data signal spreads to the entire band to be used. All users transmit by using the same frequency band simultaneously. A separate spreading code is used over  
35       each connection between a base station and a mobile

station, and the signals of the different users can be distinguished from one another in the receivers on the basis of the spreading code of each user.

5 Matched filters provided in the receivers are synchronized with a desired signal, which they recognize on the basis of a spreading code. The data signal is restored in the receiver to the original band by multiplying it again by the same spreading code that was used during the transmission. Signals multiplied by  
10 some other spreading code do not correlate in an ideal case and are not restored to the narrow band. They appear thus as noise with respect to the desired signal. The spreading codes of the system are preferably selected in such a way that they are  
15 mutually orthogonal, i.e. they do not correlate with each other. In practice the spreading codes are not orthogonal, and the signals of the other users hinder the detection of the desired signal by distorting the received signal. This mutual interference caused by the  
20 users is called multiple access interference.

The more simultaneous users there are in the system, the greater the multiple access interference. Therefore the capacity of the CDMA cellular radio system is restricted by the above-described mutual  
25 interference caused by the users. The interference can be reduced by keeping the power levels of the signals from the terminal equipments as equal as possible in the base station receiver by means of accurate power control. The base station then monitors the powers of  
30 the received signals and transmits power control commands to the terminal equipments.

A known problem in interference-limited systems is the selection of the transmit power used at the beginning of the communication over the connection.  
35 A known solution is to start transmitting with a

minimum power that is then increased by fixed steps. The disadvantage of this method is that it does not take into account the loading situation of the cell which may vary greatly, but it operates in a similar way in every situation.

5

In another known method, disclosed in Finnish patent application 952,396 that is incorporated herein by reference, the signal-to-noise ratio is estimated between a subscriber equipment and a base station in the uplink direction before the actual connection is established, and the transmit power is selected so that the desired signal-to-noise ratio is obtained. The disadvantage of this method is that since the terminal equipment starts transmitting directly with a power that is different from the minimum power, the transmission interferes with the other terminal equipments, which in turn must increase their transmit power in order to obtain a sufficient signal-to-noise ratio. In such a case, the total interference in the network increases needlessly.

10

15

20

#### Summary of the invention

25

The purpose of the present invention is to implement a method with which the correct transmit power is selected for obtaining the required signal-to-noise ratio and wherein the transmit power is increased to the desired level in such a way that no interference is caused to the other connections, taking into account the loading situation of the cell.

30

35

This is achieved with a method of the type described in the preamble, characterized in that a value with which the desired signal-to-noise ratio is obtained is calculated for the transmit power of the transmitter, and that a certain initial value is calculated for the transmit power by means of the power-control parameters of the system and a given time

constant, and that the transmission is started with the calculated initial value, and that the transmit power is increased from the initial power to said value during the given time constant.

5           The invention also relates to a cellular radio system comprising in each cell at least one base station and a group of subscriber equipments communicating with one or several base stations, and in which cellular radio system at least some transceivers  
10           comprise means for estimating the signal-to-noise ratio between a subscriber equipment and a base station before an actual connection is set up.

          The cellular radio system according to the invention is characterized in that at least some  
15           transceivers comprise means for calculating for the transmit power of the transmitter a value with which the desired signal-to-noise ratio is obtained, and means for calculating a certain initial value for the transmit power of each transmitter by means of the  
20           power-control parameters of the system and a given time constant, and that at least one transmitter comprises means for starting transmission with the calculated initial value, and means for increasing the transmit power from the initial power to said value during the  
25           given time constant.

          The arrangement according to the invention can be applied in both transmission directions, i.e. for adjusting the initial power of the transmitter of both the base station and the subscriber equipment.

30           In an arrangement according to the preferred embodiment of the invention, the base stations measure the total interference of the signals received from the terminal equipments and transmit a pilot signal with a predetermined transmit power. For the purpose of call  
35           establishment, the terminal equipments measure the

power levels of the pilot signals arriving from the base stations that are in a list of nearby base stations maintained by the terminal equipment. The attenuations over the connections between the terminal equipment and the base stations are estimated by means of the pilot signals, and the signal-to-noise ratio between the subscriber equipment and the base station in the uplink transmission direction is estimated on the basis of the total interference measured at the base station, the aforementioned attenuation over the connection, and the assumed transmit power of the terminal equipment.

In the method according to the invention, the total interference in the network is smaller than previously. Minimization of the total interference is essential in interference-limited systems, especially in CDMA systems. In systems where the traffic load varies, the optimal power level for call establishment can be obtained in each situation by utilizing the method according to the invention. The power level is not increased by fixed steps, but the rate of increase depends on the situation. The traffic load varies especially in systems with several different types of connections, such as speech and data connections, that have considerably different capacity requirements.

#### Description of the drawings

In the following, the invention will be described in greater detail with reference to the examples according to the accompanying drawings, in which

Figure 1 illustrates a cellular radio system where the method according to the invention can be applied,

Figures 2a and 2b illustrate the power control method according to the invention, and

Figure 3 is a block diagram illustrating the structure of a transceiver in a cellular radio system according to the invention.

#### Description of the preferred embodiments

5           The method and the system according to the invention will be described below in greater detail using as an example a CDMA cellular radio system utilizing a pilot signal, without restricting the description thereto, however. The method can be applied  
10           correspondingly in all interference-limited cellular radio systems. Also, the invention will be described below using as an example a situation where the initial power of a terminal equipment is adjusted. However, the invention can also be applied in a base station, as it  
15           is clear for a person skilled in the art.

          Figure 1 is a diagram of a cellular radio system where the method according to the invention can be applied. The cellular network comprises a number of  
20           base stations 100, 114 that communicate on a certain traffic channel with subscriber equipments situated within their area. In the case of a CDMA system, a traffic channel thus consists of a broad frequency band that is used by all terminal equipments when they transmit to the base station, and correspondingly, a  
25           similar frequency band is used in the downlink transmission direction, the base station transmitting to the terminal equipments situated within its area on this frequency band. In the situation illustrated in the figure, terminal equipments 110 and 112 communicate  
30           with the base station 100, and a terminal equipment 108 communicates with the base station 114.

          In the system illustrated in Figure 1, each connection typically uses a separate spreading code having a bit rate, i.e. a chip rate, that is  
35           essentially greater than the data rate, the information

to be transmitted being multiplied by the spreading code and thus being spread to the broad frequency band. On the basis of the spreading code, the receivers can distinguish the desired signal from the other signals transmitted on the same frequency band. The same frequency band is used in the area of each base station 100, 114.

Several prior art CDMA systems use a so-called pilot signal that is transmitted by each base station and that is used for the detection of base stations, for power measurement and for enabling coherent reception in a mobile station. A pilot signal is a data-unmodulated spreading-coded signal that is transmitted to the coverage area of the base station in the same manner as the actual traffic channels. In fact, the coverage area of the pilot signal determines the cell size of the base station, since the terminal equipments use the pilot signal to facilitate call establishment.

The base stations thus transmit a pilot signal continuously, and the spreading codes used for transmitting the pilot signals of different base stations differ from each other in such a way that a terminal equipment can identify the base stations by means of the pilot they have transmitted.

Subscriber equipments continuously measure the pilot signals. In order to reduce the measurement load of a terminal equipment, in the prior art systems each terminal equipment keeps a list of the base stations that are situated near the terminal equipment and that are possible candidates for handover or call establishment, and of the corresponding spreading codes of the pilot signals. This list will be called below a measurement list. The terminal equipments monitor with the highest priority the pilot signals of only those

base stations that are on the measurement list. The other detected pilot signals are measured secondarily.

Subscriber equipments continuously measure the quality of pilot signals transmitted from different base stations. This is necessary for maintaining the connection quality of the terminal equipment. On the basis of the measurements, it is possible to perform a handover, if necessary, to a base station providing better connection quality. In a CDMA system it is also possible that the terminal equipment communicates simultaneously with more than one base station, which is called macrodiversity. The measurements of the pilot are also essential during the call set-up, since the terminal equipment selects the base station providing the best connection when it transmits a call-set-up message.

Each terminal equipment thus has a list of the base stations that are situated near the terminal equipment and that are possible candidates for handover or call establishment, and of the corresponding spreading codes of the pilot signals. The terminal equipment measures all the pilot signals it detects, but the signals from the base stations on the measurement list are measured more often than the others, since a handover or call set-up is more likely to be performed to those base stations than to base stations situated further away. The aim is to save the measurement capacity of the terminal equipment and to direct it to signals whose changes should be detected rapidly.

In the following, the method according to the invention will be described first on the assumption that the signal-to-noise ratio over a connection between a terminal equipment and a base station and the

corresponding transmit power are estimated in the terminal equipment.

The base stations transmit information on control channels to the terminal equipments concerning the transmit power  $P_{t,pilot}$  used for transmitting the pilot signal. Each terminal equipment measures the power  $P_{r,pilot}$  with which each pilot signal is received from each base station. On the basis of this information and the power measurement it has performed, each terminal equipment can calculate the attenuation  $L$  over the connection between the base station and the terminal equipment, i.e. the attenuation of the transmitted signal over the radio path, according to the following formula:

$$L = \frac{P_{t,pilot}}{P_{r,pilot}}$$

The base stations also transmit information on the control channel to the terminal equipments about the interference level  $I_{tot}$  they have measured in the uplink transmission direction. This information is transmitted from the base stations to the terminal equipments whenever the information changes, i.e. whenever there are significant changes in the interference level. It is then possible to forward to the terminal equipments the interference data of several base stations situated nearby.

In the arrangement according to the invention, the signal-to-noise ratio in the uplink transmission direction, i.e. from the terminal equipment to the base station, is estimated. The actual transmission direction does not have to exist for the estimation to take place. This is the case in a situation where the terminal equipment does not communicate with any base

station, and it selects the base station to which it transmits the call-set-up message on the basis of the estimate it has calculated and the measurements of the pilot signal. The connection quality of the uplink transmission direction is thus estimated in advance.

The terminal equipment performs the estimation by first calculating the attenuation over the connection between the base station to be estimated and the terminal equipment in the manner described above. The terminal equipment still stores information about the transmit power  $P_{MS}$  it has supposedly used, which power can be selected in such a way that the estimated SIR can be adjusted to a suitable level on the basis of several estimation rounds, if necessary.

The terminal equipment further divides the transmit power  $P_{MS}$  by the attenuation  $L$  over the connection. The estimate  $SIR$  for the signal-to-noise ratio in the uplink direction is then obtained by dividing the aforementioned divided power by the total interference of the base station from which one has subtracted the effect of the signal from the estimating terminal equipment:

$$SIR = \frac{\frac{P_{MS}}{L}}{I_{tot} - \frac{P_{MS}}{L}}$$

25

When the amount of calculation is to be reduced, it is possible to calculate for the signal-to-noise ratio a less accurate estimate where the effect of the signal of the estimating terminal equipment has not been removed from the total interference of the base station:

30

$$SIR = \frac{\frac{P_{MS}}{L}}{I_{tot}}$$

The SIR has been described above as the ratio of two powers, but it can also be defined, if desired, by means of other units, such as decibels.

5           If the estimation is not performed in the terminal equipment but in the network, for example in the base station, the estimation can also then be performed in the above-described manners and by using the formulas. However, the terminal equipment must  
10           transmit on the control channel information to the base station about the received power level of the pilot  $P_{r,pilot}$  and about the assumed transmit power of the terminal equipment  $P_{MS}$ . Correspondingly, the base station does not have to inform the terminal equipments  
15           of the total interference  $I_{tot}$ .

          Since the terminal equipment does not communicate with any base station, the signalling between the base station and the terminal equipment takes place on the general calling channels.

20           The above-described method thus provides the transmit power  $P_{MS}$  that produces the required signal-to-noise ratio SIR. The transmit power can also be estimated by other methods than the one described above.

25           In the method according to the invention, the terminal equipment does not start transmitting immediately with the transmit power calculated above, so that additional interference in the total interference of the system would be avoided. Instead,  
30           the method according to the invention comprises calculating the initial power  $P_{i,MS}$  with which the

transmission is started and from which the power is gradually increased to the calculated value. A suitable initial power can be calculated on the basis of the calculated actual power level and the power-control parameters of the system, for example with the following formula

$$P_{i,MS} = P_{MS} * \frac{t_{PCrate}}{t_{setup}},$$

wherein  $t_{PCrate}$  denotes the updating rate of the power control in the system, i.e. the length of time between the adjustments of the power of the terminal equipments.  $t_{setup}$  denotes a time constant during which the transmit power is set to a level that has been calculated in advance.

The transmit power of the terminal equipment is thus increased to the desired level according to the normal power control updating rate of the system during a given time constant  $t_{setup}$ . The method is illustrated by way of example in Figure 2a. The horizontal axis of the figure shows the time and the vertical axis shows the transmit power of the terminal equipment. Assume that the transmission of the terminal equipment begins at a moment  $t_0$ . The transmission is then started with the initial power level of  $P_{i,MS}$ . The power control updating rate of the system is  $t_{PCrate}$  and the next time the power is adjusted is at a moment  $t_0 + t_{PCrate} = t_1$  and correspondingly at moments  $t_2$  and  $t_3$ . In the example of the figure, the desired power level  $P_{MS}$  is thus obtained by three steps. In an actual situation, the number of the steps is naturally different and varies depending on the situation.

According to an embodiment of the invention, the calculated power level  $P_{MS}$  is updated during the power control, and when the loading of the system

changes, the desired signal-to-noise ratio  $SIR$  and therefore also the desired power level may change. The situation is illustrated in Figure 2b. Assume that the transmission of the terminal equipment begins at the moment  $t_0$ . The transmission is then started with the initial power level  $P_{i,MS}$  that has been calculated on the basis of the transmit power  $P_{MS1}$  determined by the desired signal-to-noise ratio. Assume that at the moment  $t_2$  it is detected that the desired signal-to-noise ratio  $SIR$  has changed. The transmit power  $P_{MS2}$  corresponding to the new ratio differs from the one calculated previously. Correspondingly, if the total interference  $I_{tot}$  changes, the transmit power must be changed in order to obtain the desired  $SIR$ . A new power control step is then calculated on the basis of the current transmit power. In the example of Figure 2b, the length of the step decreases.

Examine below the structure of a transceiver used in a cellular radio system according to the invention. Figure 3 illustrates a transceiver of a cellular radio system where the method according to the invention can be applied. The transceiver may be situated either in the base station equipment or it may be a subscriber equipment. The structure of the equipment is similar in both alternatives in the elements essential to the invention.

The transceiver comprises means for encoding the signal to be transmitted, the signal encoded with the means being supplied to means for interleaving the encoded signal. The output signal of the interleaving means is connected to the input of means where the burst to be transmitted is formed. The obtained signal is supplied to modulation means that have an output signal that is supplied via a

transmitter unit 310 and a duplex filter 312 to an antenna 314.

5 The transceiver further comprises a receiver unit 316 where the received signal is converted into an intermediate frequency, and converter means 318 where the signal is converted into a digital form. The converted signal is supplied to detection means 320 from where the detected signal is supplied further to deinterleaving means 322 and to means 324 where the  
10 received signal is decoded i.e. subjected to both channel and speech decoding. The equipment further comprises control and calculation means 326 which control the operation of the other aforementioned blocks. The control and calculation means are typically  
15 realized by means of a processor.

The base station equipment according to the invention comprises means 320, 326 for measuring the total interference of the signal received from the terminal equipments, and means 300-314, 326 for  
20 transmitting a pilot signal with a known transmit power. Correspondingly, the subscriber equipment comprises means 320, 326 for measuring the power of the pilot signal it has received from the base station. If the system is a CDMA system, the receivers, which are  
25 typically realized with the rake principle, have a detection block that normally comprises several receiver branches at least one of which is a so-called searcher branch that measures the strengths of the pilot signals.

30 A transceiver according to the preferred embodiment of the cellular radio system of the invention also comprises means 320, 326 for estimating the attenuation over the connection between the terminal equipment and the base station by means of the  
35 received power of the pilot signal and the power used

in the transmission. The transceiver of the cellular radio system according to the invention further comprises means 320, 326 for estimating the signal-to-noise ratio of the uplink direction and the required transmit power  $P_{MS}$  on the basis of the total interference and the attenuation over the connection measured according to the above-described method. The transceiver further comprises means (326) for calculating a certain initial value  $P_{i,MS}$  for the transmit power of each terminal equipment on the basis of the power-control parameters of the system and a given time constant.

In the system according to the invention, at least one terminal equipment (108-112) comprises means (310, 326) for starting transmission to the base station (100) with the calculated initial value, and means (310, 326) for increasing the transmit power from the initial power to the aforementioned value during a given time constant  $t_{setup}$ .

Even though the invention is described above with reference to the example according to the accompanying drawings, it is clear that the invention is not restricted thereto, but it can be modified in many ways within the scope of the inventive idea disclosed in the appended claims.

## Claims:

1. A method for adjusting transmit power  
5 during call set-up in a cellular radio system  
comprising in each cell at least one base station (100)  
and a group of subscriber equipments (108-112)  
communicating with one or several base stations, and in  
which method the signal-to-noise ratio between a  
10 subscriber equipment and a base station is estimated  
before an actual connection is set up, c h a r a c -  
t e r i z e d in that

a value with which the desired signal-to-noise  
ratio is obtained is calculated for the transmit power  
15 of the transmitter (100, 108-112), and that

a certain initial value is calculated for the  
transmit power by means of the power-control parameters  
of the system and a given time constant, and that

20 the transmission is started with the  
calculated initial value, and that

the transmit power is increased from the  
initial power to said value during the given time  
constant.

2. A method according to claim 1, c h a r a c -  
25 t e r i z e d in that the signal-to-noise ratio  
between the subscriber equipment (108-112) and the base  
station is estimated in the uplink direction, and that  
the initial transmit power is adjusted in the  
subscriber equipment.

30 3. A method according to claim 1, c h a r a c -  
t e r i z e d in that the signal-to-noise ratio  
between the subscriber equipment (108-112) and the base  
station (100) is estimated in the downlink direction,  
and that the initial transmit power is adjusted in the  
35 base station.

4. A method according to claim 2, c h a r a c-  
t e r i z e d in that

the base stations (100) measure the total  
interference of the signals they have received from the  
5 terminal equipments (108-112) and

transmit a pilot signal with a predetermined  
transmit power, and that

for the purpose of call set-up, the terminal  
equipments measure the power levels of the pilot  
10 signals from the base stations that are on the list of  
nearby base stations maintained by the terminal  
equipment, and that

the attenuations over the connections between  
the terminal equipment and the base stations are  
15 estimated by means of the pilot signals, and that

the signal-to-noise ratio between the  
subscriber equipment and the base station in the uplink  
direction is estimated on the basis of the total  
interference measured in the base station, said  
20 attenuation over the connection, and the assumed  
transmit power of the terminal equipment.

5. A method according to claim 4, c h a r a c-  
t e r i z e d in that the estimate for the signal-to-  
noise ratio is obtained by dividing the assumed  
25 transmit power of the terminal equipment by the  
estimated attenuation over the connection and by  
calculating the ratio of the value obtained in this  
manner to the total interference measured in the base  
station.

6. A method according to claim 5, c h a r a c-  
t e r i z e d in that the effect of the connection in  
question to the total interference has been subtracted  
from the total interference before the estimate for the  
30 signal-to-noise ratio has been calculated.

7. A method according to claim 1, c h a r a c-  
t e r i z e d in that the transmit power is increased  
from the initial power to the calculated power level  
according to the power control updating rate of the  
5 system.

8. A method according to claim 1, c h a r a c-  
t e r i z e d in that the calculated power level to  
which the transmit power is increased is updated  
according to the power control updating rate of the  
10 system.

9. A method according to claim 1, c h a r a c-  
t e r i z e d in that a certain initial value is  
calculated for the transmit power by multiplying the  
ratio between the power control updating rate of the  
15 system and the given time constant by the final desired  
value of the transmit power.

10. A cellular radio system comprising in each  
cell at least one base station (100) and a group of  
subscriber equipments (108-112) communicating with one  
20 or several base stations, and in which cellular radio  
system at least some transceivers (100, 108-112)  
comprise means (320, 326) for estimating the signal-to-  
noise ratio between a subscriber equipment and a base  
station in the uplink direction before an actual  
25 connection is set up, c h a r a c t e r i z e d in  
that at least some transceivers (100, 108-112) comprise  
means (326) for calculating for the transmit  
power of the transmitter a value with which the desired  
signal-to-noise ratio is obtained, and

30 means (326) for calculating a certain initial  
value for the transmit power of each transmitter (100,  
108-112) by means of the power-control parameters of  
the system and a given time constant, and that

at least one transmitter (100, 108-112) comprises means (310, 326) for starting transmission with the calculated initial value, and

5 means (310, 326) for increasing the transmit power from the initial power to said value during the given time constant.

11. A cellular radio system according to claim 8, c h a r a c t e r i z e d in that said transceiver (108-112) is situated in the subscriber equipment.

10 12. A cellular radio system according to claim 8, c h a r a c t e r i z e d in that said transceiver (108-112) is situated in the base station (100).

13. A cellular radio system according to claim 11, c h a r a c t e r i z e d in that the base stations (100) comprise

15 means (320, 326) for measuring the total interference of the signals received from the terminal equipments, and

20 means (310) for transmitting a pilot signal with a predetermined transmit power, and that at least one terminal equipment (108-112) comprises

25 means (320, 326) for measuring the power levels of the pilot signals received from the different base stations, and in which cellular radio system at least some transceivers (100, 108-112) comprise

30 means (320, 326) for estimating the attenuations over the connections between the terminal equipment and the base stations by means of the pilot signals, and means (320, 326) for estimating the signal-to-noise ratio between the subscriber equipment and the base station in the uplink direction on the basis of the total interference measured in the base station (100), said attenuation over the connection, and the assumed transmit power of the terminal equipment (108-112).

35

14. A cellular radio system according to claim 11, characterized in that the means (320, 326) for estimating the signal-to-noise ratio between the subscriber equipment and the base station are situated in the subscriber equipment (108-112).

15. A cellular radio system according to claim 11, characterized in that the means (320, 326) for estimating the signal-to-noise ratio between the subscriber equipment and the base station are situated in the base station (100).

16. A cellular radio system according to claim 11, characterized in that at least one transmitter comprises means (310, 326) for increasing its transmit power from the initial power to the calculated power level according to the power control updating rate of the system.

17. A cellular radio system according to claim 11, characterized in that at least one transmitter comprises means (310, 326) for updating the calculated power level to which the transmit power of the terminal equipment is increased according to the power control updating rate of the system.

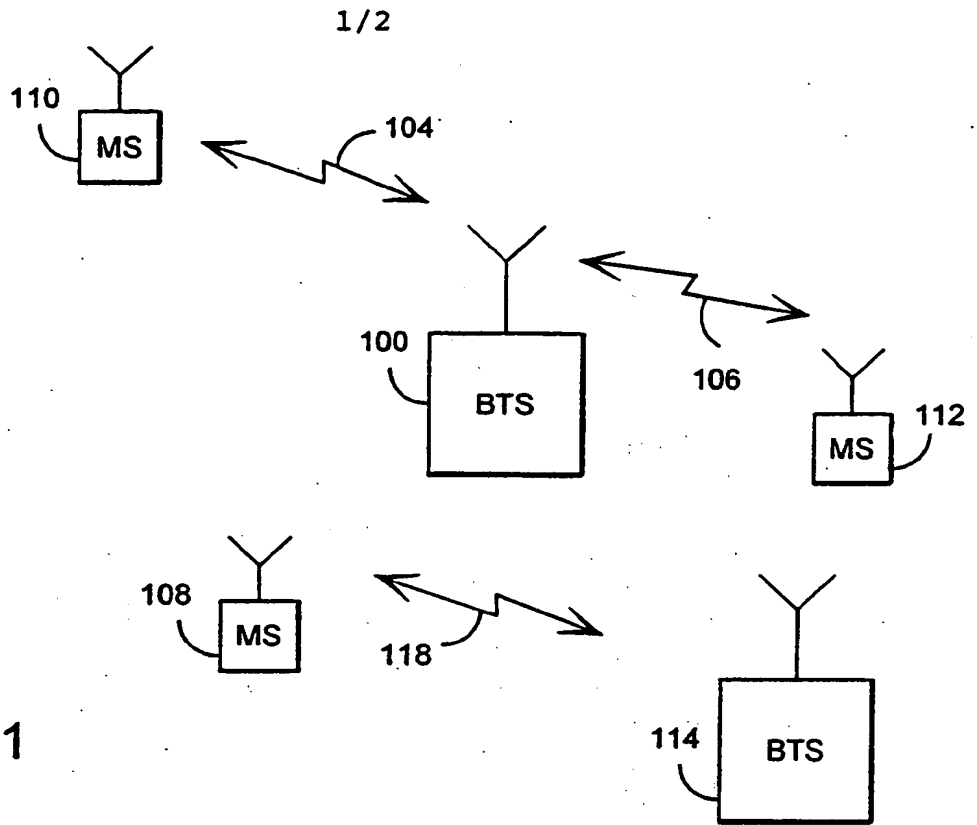


Fig. 1

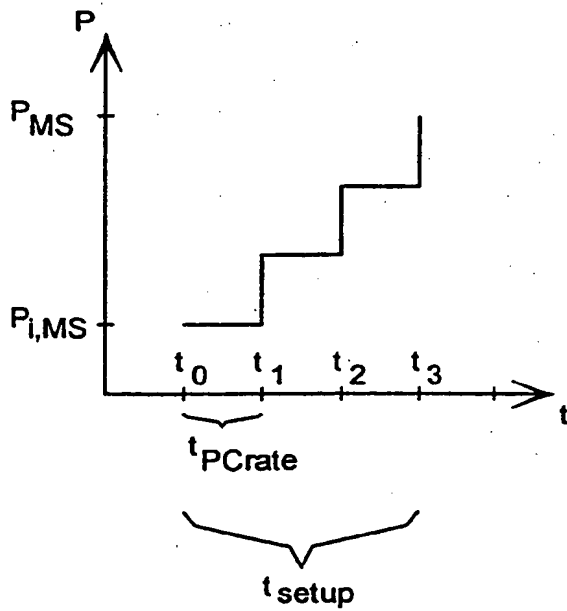


Fig. 2a

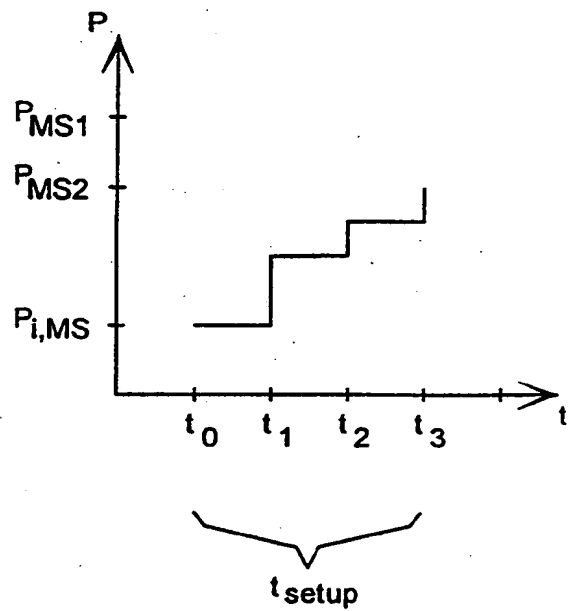


Fig. 2b

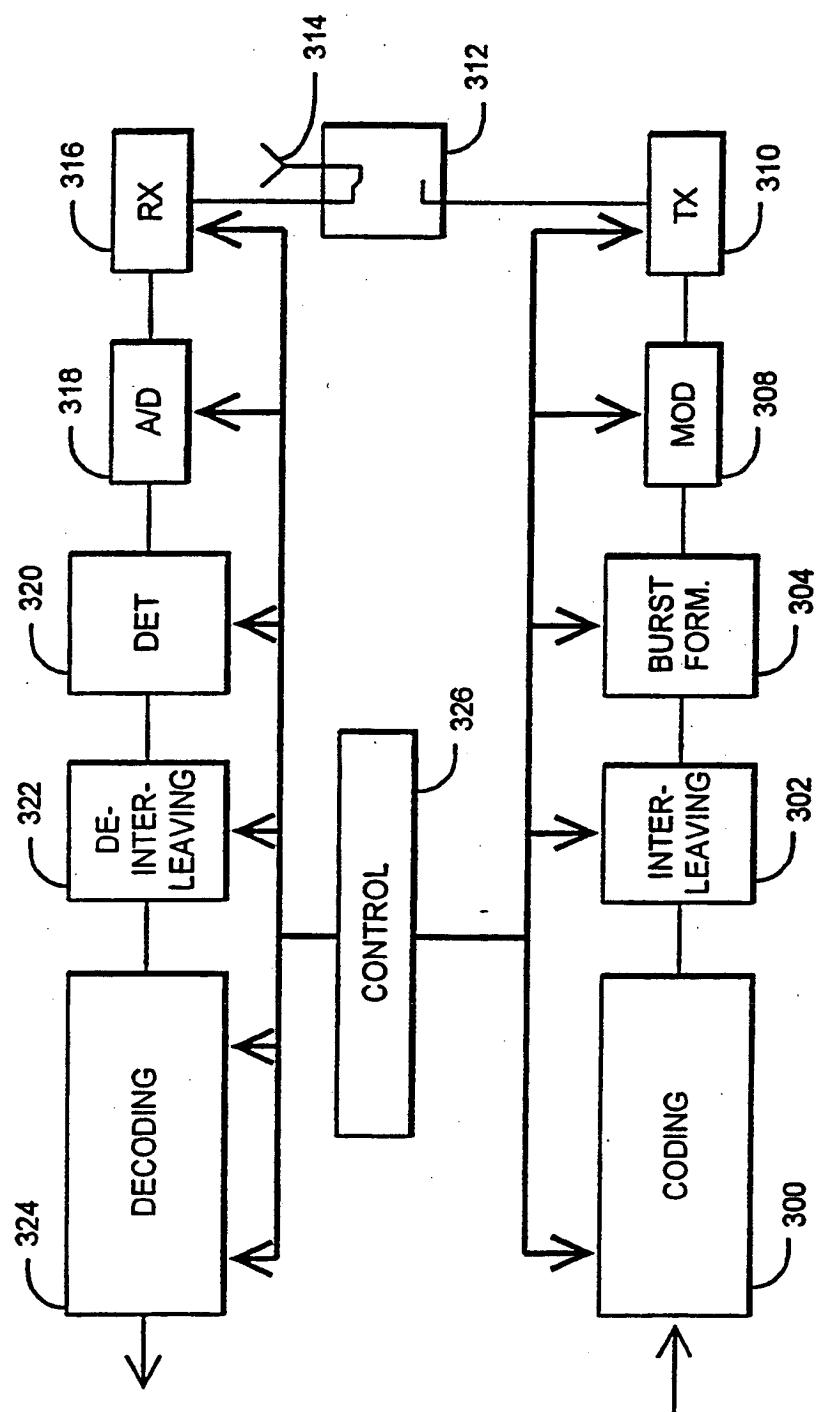


Fig. 3

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 96/00444

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04B 7/005

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9319537 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 30 Sept 1993 (30.09.93), abstract --	1-17
A	WO 9502950 A1 (NOKIA TELECOMMUNICATIONS OY), 26 January 1995 (26.01.95), abstract --	1-17
A	WO 8804498 A1 (BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY), 16 June 1988 (16.06.88), abstract -----	1-17

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

14 January 1997

Date of mailing of the international search report

15.01.1997

Name and mailing address of the ISA/  
 Swedish Patent Office  
 Box 5055, S-102 42 STOCKHOLM  
 Facsimile No. +46 8 666 02 86

Authorized officer

Mikael Sollerhed  
 Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

28/10/96

International application No.  
PCT/FI 96/00444

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A1- 9319537	30/09/93	AU-B- 659308	11/05/95
		AU-A- 3910893	21/10/93
		BR-A- 9305449	11/10/94
		CA-A- 2109114	25/09/93
		EP-A- 0586681	16/03/94
		FI-D- 935194	00/00/00
		JP-T- 6508492	22/09/94
		NZ-A- 251478	21/12/95
		SE-D- 9200915	00/00/00
		US-A- 5487174	23/01/96
WO-A1- 9502950	26/01/95	AU-A- 7126594	13/02/95
		CN-A- 1127057	17/07/96
		EP-A- 0709016	01/05/96
		FI-A- 933209	15/01/95
		NO-A- 960154	12/01/96
WO-A1- 8804498	16/06/88	AU-B- 608267	28/03/91
		AU-B- 643529	18/11/93
		AU-A- 7920991	03/10/91
		AU-A- 8277187	30/06/88
		DE-A, T- 3784942	22/04/93
		EP-A, B- 0334867	04/10/89
		SE-T3- 0334867	
		HK-A- 130096	26/07/96
		JP-T- 2501521	24/05/90
		US-A- 5289459	22/02/94

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**